


# The 620BH Igniter Circuit Tester & Fail-Safe Ohmmeter

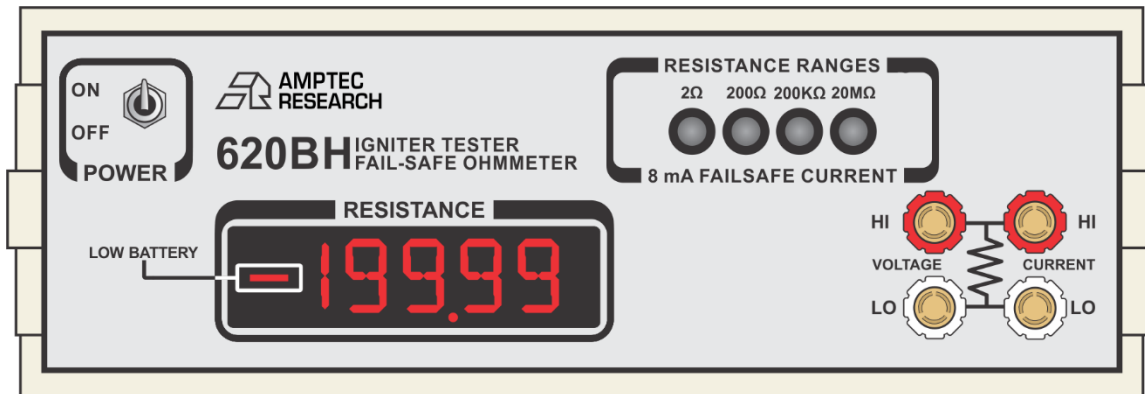

## The gold standard in ultra-safe resistance testing.

The 620BH Igniter Tester is a portable digital ohmmeter specifically designed for ultra-safe resistance testing on explosive devices. Approved by the USAF Non-nuclear Munitions Safety Board and compatible with our RS232C Interface (OP-232), this product is the safest and easiest to use in its field.

The AMPTEC 620BH offers fail-safe current limiting resistor network circuitry to ensure that instrument test currents cannot exceed 8 mA. In the unlikely event of a component failure, the output current limiting network would still be in effect. If the 620BH had an electrical fault, it offers the life-saving advantage of failing safely.

The 620BH is part of a lineage of intrinsically safe igniter circuit testers in the 620 Series product line, enabling you to take high-accuracy resistance measurements across virtually any range from 2  $\Omega$  to 20 M $\Omega$ .

Every AMPTEC product is proudly made from start to finish in the USA and comes with a one-year warranty, plus an N.I.S.T calibration certificate with data at no extra cost.



## AMPTec 620BH Igniter Circuit Tester Datasheet

The below specifications apply to units that are purchased as a part of our 620BH Commercial Package with no additional options. For information on the specifications of units with additional options, please refer to the following page.

### AMPTec 620BH Range, Resolution, Accuracy, & Current Levels

<b>Range</b>	2 Ω	200 Ω	200 KΩ	20 MΩ
<b>Nominal Current</b>	5 mA	0.5 mA	0.5 μA	5 nA
<b>Failsafe Current</b>	8 mA	8 mA	8 mA	8 mA
<b>Resolution</b>	100 μΩ	10 mΩ	10 Ω	1 KΩ
<b>Accuracy</b>	± .02% of reading & ± .05% of range	± .02% of reading & range	± .05% of reading & range	± 2% of reading & ± .02% of range

### AMPTec 620BH General Specifications

<b>Display</b> .....	4 ½ digit LED display	<b>Dimensions</b> .....	9.75" x 10" x 3.25"
<b>Input Voltage</b> .....	4.8 VDC maximum	<b>Internal Voltage</b> .....	250 VDC maximum
<b>Low Battery</b> .....	Display reads "—"	<b>Open Circuit</b> .....	1.6 VDC
<b>Overload/Overrange</b> .....	Display flashes	<b>Terminal</b> .....	Banana jack binding posts
<b>Temperature Coefficient</b> ...	± 0.002% per 1° C	<b>Temperature Limit (Operating)</b> .....	0° to 50° C
<b>Temperature Limit (Storage)</b> .....	-20° to 70° C	<b>Update Rate</b> .....	3 readings per second
<b>Weight (Standard Version)</b> .....	3.5 lbs.		

### AMPTec 620BH Power Specifications

<b>Batteries</b> .....	4ea 5000 mAh NICAD batteries	<b>Battery Charge Time</b> .....	~8 hrs. til full charge
<b>Battery Charger</b> .....	AMPTec 620-DC	<b>Battery Charger Charging Current</b> .....	2A max
<b>Battery Charger Input</b> .....	90 – 264 VAC	<b>Battery Life</b> .....	1000 cycles or 3 years
<b>Battery Charger Output</b> .....	5.9V		

### OP-232 RS232C Interface Specifications

*This option enables your unit to connect to a computer and receive commands via RS232C. OP-232 comes standard with the purchase of a 620BH Igniter Tester.*

<b>Connection</b> .....	DE-9 connector	<b>Rear terminal block</b> ....	4 Gold-Plated terminals
-------------------------	----------------	---------------------------------	-------------------------

## AMPTEC 620BH Igniter Circuit Tester Datasheet Continued

### OP-247 Optically Isolated Power Specifications

*This option enables your unit to be ran via AC power, allowing for uninterrupted use. Unless otherwise noted in the table below, all other specifications match those listed in the general specifications section.*

AC/DC adaptor .....	AMPTEC 247-DC	Adaptor input .....	120VAC
Adaptor output .....	24 VDC	Unit Weight .....	2.3 lbs

### Op-519 Rack Mount Specifications

*This option, OP-519S (for single units) and OP-519D (for dual units), allows your unit to be rack mounted. Unless otherwise noted in the table below, all other specifications match those listed in the general specifications section.*

#### OP-519S (Single Unit)

Dimensions .....	19" x 3.5" x 10"
Materials .....	ABS plastic face, aluminum
Weight .....	2.3 lbs (plus unit weight)

#### OP-519D (Dual Units)

Dimensions .....	19" x 3.5" x 10"
Materials .....	ABS plastic face, aluminum
Weight .....	2.1 lbs (plus unit weights)



### AMPTEC 620BH Ordering Information

<b>620BH</b>	Igniter tester, OP-300 leads, 620-DC battery charger, N.I.S.T. calibration certificate
<b>OP-100</b>	Meter transit/hard shell case
<b>OP-110</b>	Test lead storage pouch
<b>OP-232</b>	RS232C computer Interface
<b>OP-247</b>	Optically isolated power
<b>OP-290</b>	Alligator clip test lead set
<b>OP-300</b>	Gold plated 4-Wire Kelvin clip leads
<b>OP-302</b>	5-way banana jack backed Kelvin clips
<b>OP-401</b>	Gold plated single tip Kelvin probes
<b>OP-519S</b>	Single rack mount tray
<b>OP-519D</b>	Dual rack mount tray

*The above is only a small selection of the accessories that are compatible with the 620BH meter. For a full list or pricing information, please contact us via our website: [www.amptec.com](http://www.amptec.com)*